









NAME: SunRiver Adjustable LED Wall Pack Light

P/N: 48040-AT1N

## Advantage:

- > UL cUL
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO humming
- Green and eco-friendly without mercury.





### Application:

- Entrance lighting, courtyard lighting
- Industrial lighting, Outdoor landscape lighting;
- Commercial building, hotel;
- Wall lighting area and so on.



# **TECHNICAL DATA SHEET**

### **Product Specifications**

Product name	SunRiver Adjustable LED Wall Pack Light
Part No	48040-AT1N
Dimension	9.1 x 5.2 x5.7 inches

#### **Technical Characteristic**

Color temperature	4000K、5000K、5700K			
CRI	>70			
Lumen	4800-5200LM			
Lumen Efficacy	120-130LM/W			
Input Power	40W			
Viewing Angle	60°			
Input Voltage	100-277VAC 50/60Hz			
PF	>0.9			
Waterproof Rating	IP65			

### **Materials**

LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D
LED QTY	49 PCS
Housing	Aluminum
Housing color	Black

### Others


Operating Temperature	-20°C TO 45°C		
Operating Humidity	20%-90% RH		
Storage Temperature	-30°C TO 80°C		
Storage Humidity	10%-95%		
Application	Indoor / Outdoor		
Safety Certification	UL\ cUL		
Warranty Time	5 Years		




## **TECHNICAL DATA SHEET**

#### **Light Distribution Testing Parameters**

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.76 lm/W			
MODES		Imax(cd)	4601	S/MH(CO/180)	0.86
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.88
RATED VOLTAGE(V)	120	TOTAL FLUX(1m)	4886.2	η UP, DN(C0-180)	0.1,50.1
NOMINAL FLUX(1m)	4886.23	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.1,49.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	0.95

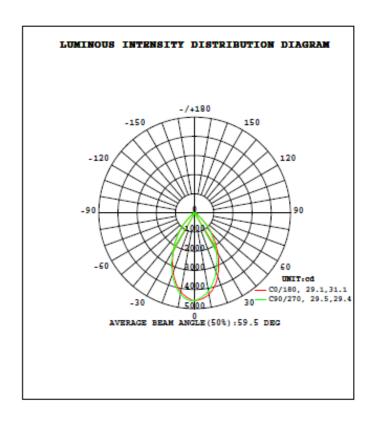

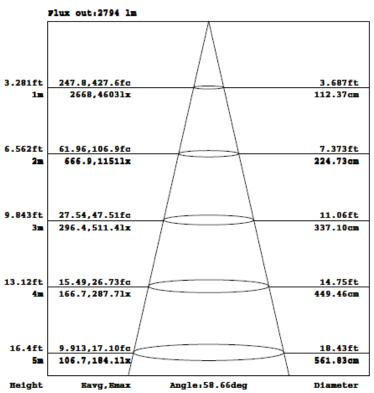



## **TECHNICAL DATA SHEET**

#### **Notice For User**

- Please turn off power before installing or changing assembly parts.
- ◆ The input voltage and the lamp's should be matched. After connecting the power line, please make sure the wiring section is insulated.
- ◆ Non-professionals must not install or disassemble the lamps.
- ◆ LED lights provide exceptional efficiency and performance. To maintain light longevity it is important to turn LED lights off to cool down. Please do not keep LED lights on for more than 14 continuous hours. Keep our planet green by using LED lighting.

#### **Trouble Shooting**

Trouble	Check points
Flickering light	Turn off the power and turn on again in 3 minutes. If same phenomena occurs, then call customer service
Not working	Please check the connection