

---

# LED Panel Light

---






## Product Features

1. Certificate: cULus & FCC
2. Lifespan > 50,000 hours & 5 years warranty.
3. Flicker-free driver, 0-10V dimming can be well compatible with most dimmers;
4. Even & uniform light: branded PMMA light guide plate with perfect laser screening and light distribution technology.
5. Use high quality SMD LEDs
6. Aluminum Alloy Frame: strong and firm due to special fabrication processing; Frame color can be silver or white
7. Installation: Recessed ; Suspended ; Surface-mounted.
8. Human-friendly Junction driver box for fire-proofing and easy installation.

## Product Dimension

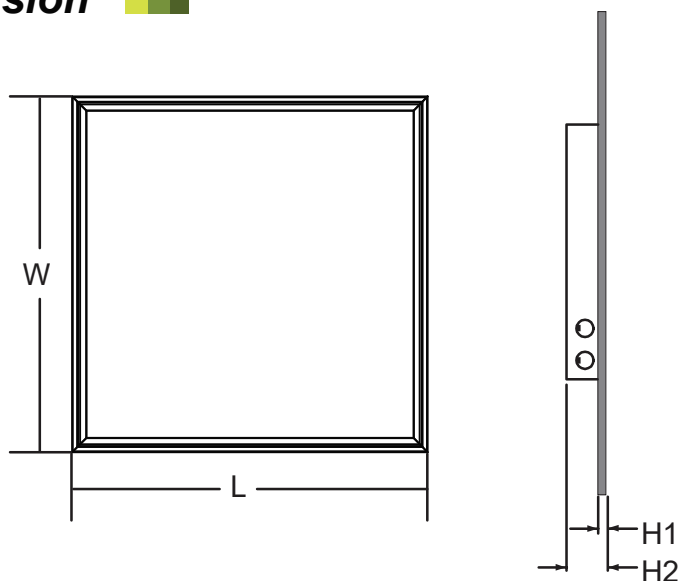

Part No.	Size(ft)	Outline Dimension(inch)			
		L	W	H1	H2
6020-P-30W	2' × 2'	23.74	23.74	0.3937	1.969
6011-P-30W	1' × 4'	47.72	11.85	0.3937	1.969
6031-P-30/40W	2' × 4'	47.72	23.74	0.3937	1.969





## Specification





Size	Model	Power	Input Voltage	Efficacy	CCT	Beam angle	Life Span	Dimmable
1ft*4ft	6011-P-30W	30W	AC100~277V	130lm/w	3500K, 4000K, 5000K	120	>50,000hrs	0-10V
2ft*2ft	6020-P-30W	30W						
2ft*4ft	6031-P-40W	40W						
2ft*4ft	6031-P-30W	30W						





# Test Report

6020-P-30W

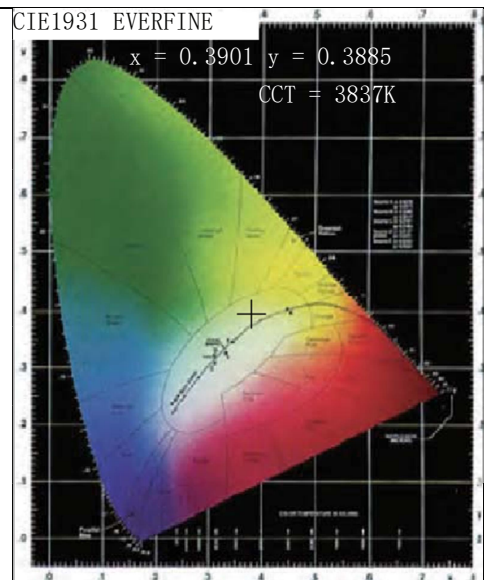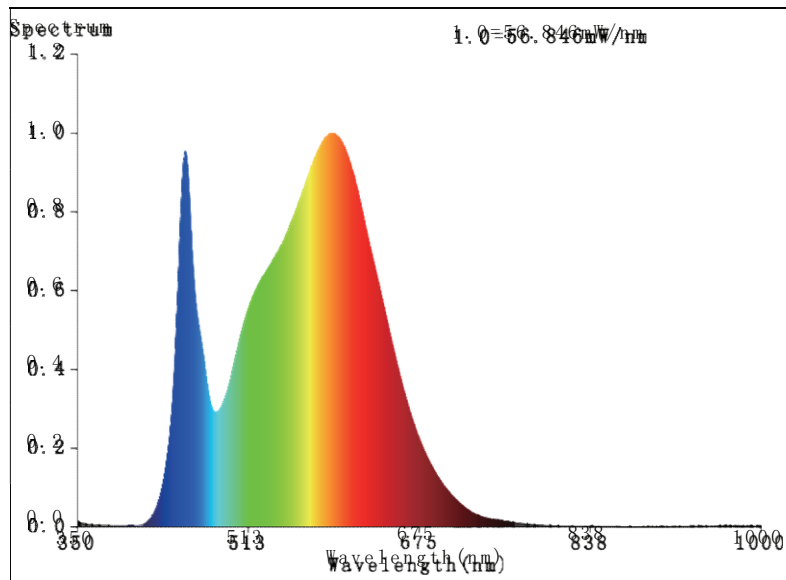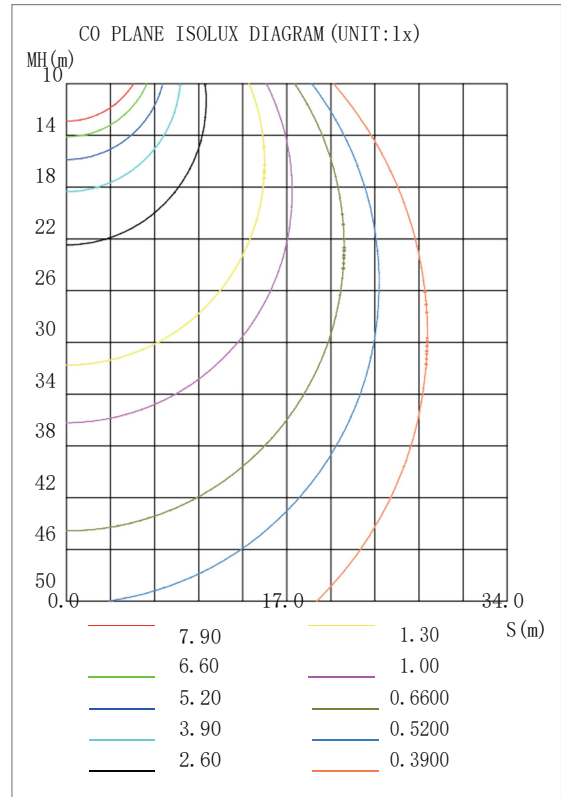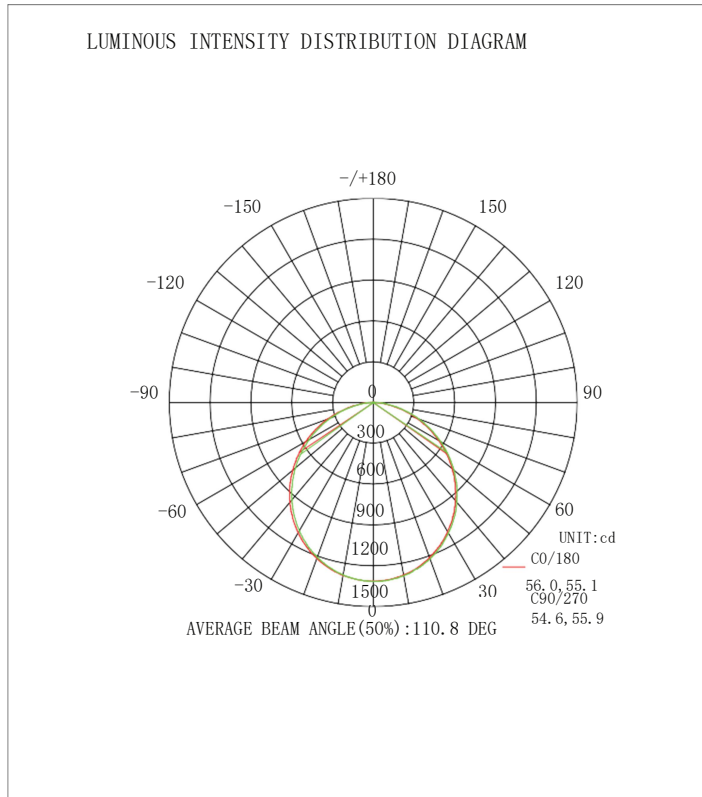

# 6031-P-40W

